


# IVXIV

BESPOKE 4x4 GEAR

## FULL FACE ROOF CONSOLE

### INSTALLATION GUIDE

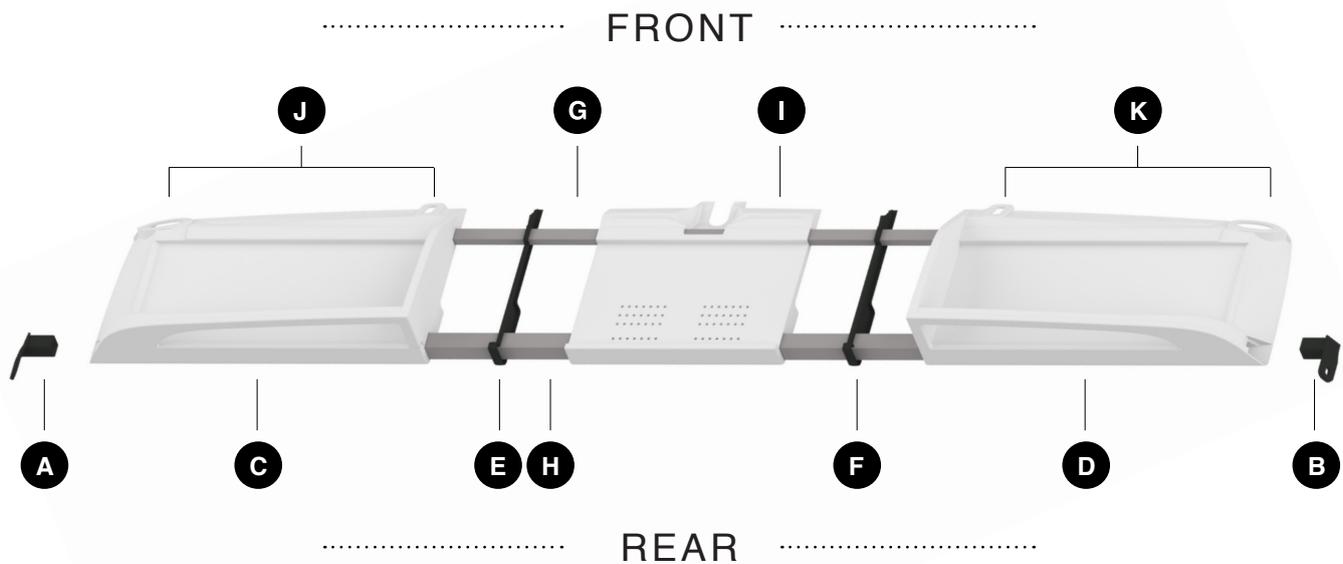

#### INDEX

- A** Left Grab Handle Bracket
- B** Right Grab Handle Bracket
- C** Left Full Face Compartment
- D** Right Full Face Compartment
- E** Left Floating Joint
- F** Right Floating Joint
- G** Front Aluminium Tube  
(18 x 12 x 1000mm)
- H** Rear Aluminium Tube  
(25 x 25 x 1 220mm)
- I** Middle Compartment
- J** Left Compartment Sun Visor  
Mounting Points
- K** Right Compartment Sun Visor  
Mounting Points

#### TOOLKIT

**Note:** Allen key provided.  
Phillips screw driver required.

The toolkit is provided and located within a front support bracket.



Self-Tapping S/S  
Screw  
19mm x 6



Flat S/S  
Washer  
18mm x 1



Threaded S/S  
Button Head Screw  
16mm x 1



Allen  
Key  
x1

**Note:** The installation is quick and easy using **factory mounts only**. Do not use any form of force and if resistance is encountered refer back to these instructions:

### CABIN PREPARATION

1. Remove the Sun Visors using a star screwdriver. Each Sun Visor has three screws.
2. Clip off the plastic cover on the passengers "Roof Grab Handle" and remove the screw.
3. There is no "Roof Grab Handle" on the driver's side, but you will need to clip off the circular plastic cover.

### CONSOLE INSTALLATION

1. The Roof Grab Handle Brackets will need to be swapped around and oriented as shown **A** & **B**.
2. Lift the entire console up to the roof and align Left Grab Handle Bracket **A** under the "Roof Grab Handle" on the passenger side. Insert the original screw and LOOSELY tighten.
3. Align the Right Grab Handle Bracket **B** over the hole, insert the threaded S/S button head screw (16mm), and LOOSELY tighten using the allen key.
4. Re-install both the sun visors through the mounting points **J** & **K** using the self-taping S/S screws (19mm) and tighten fully.
5. Tighten the Grab Handle Brackets screws fully.
6. Clip the plastic cover back onto the passengers "Roof Grab Handle".
7. Insert the Noise Reducing Mats into each Compartment.

**Note:** Ensure the console is supported on both sides during the installation.

### DISCLAIMER & WAIVER

**Note:** That this product requires **assembly** and **installation**.

1. You may be required to remove and/or replace existing components on your vehicle.
2. Your vehicle's warranty may be voided or partially negatively impacted by the addition and/or removal of factory-fitted and/or after-market components.
3. If executed incorrectly, you may damage your vehicle.
4. The assembly and installation guide must be strictly adhered to with careful attention to be paid to all instructions.
5. The instructions must be followed sequentially.
6. Certain tools, whether powered or manual, may have to be used during installation. Be sure that you have all necessary/indicated tools available before beginning installation.
7. Only use tools in a safe manner and/or as instructed by the tool manufacturer.
8. If your vehicle has been modified and/or fitted with different components and/or after-market additions, your installation may differ to the procedure described in this guide.
9. You, the customer and/or end-user, acknowledge and accept that –
  - 9.1. bodily harm or injury may be suffered during and/or due to the installation process, whether as a result of accident, negligence or otherwise; and
  - 9.2. assembly and/or installation of the product may damage your vehicle and/or negatively impact your vehicle's warranty; and
  - 9.3. the driver and/or passengers in the modified vehicle may suffer bodily harm or injury as a result of use, misuse, impact/product proximity of the product in the vehicle cabin, whether as a result of accident, negligence or otherwise; and, accordingly, indemnify and hold harmless IVXIV Bushindaba (Pty) Ltd from any and all damages that may be suffered (1) whether as a result of financial damages and/or bodily harm arising out of and/or due to the installation of the products, (2) use of the products, (3) to the products themselves and/or the vehicle and/or any part/s thereof during the assembly and/or installation process and whether in respect of any driver of and/or passengers in the vehicle.

*The product has been examined for quality control purposes:*

• Maximum distributed loading weight	6.5kg (six and a half kilograms)
• Maximum external temperature tolerance	70°C

Please ensure that all items stowed in this product are secured and/or not harmful to driver and/or passengers during an accident, impact or the like and/or during any use where such items may roll and/or fall from the product.

Incorrect use of this product and/or use beyond intended or reasonable purpose may void your warranty in respect of this product.

Proceeding with installation is deemed to be an acknowledgement and acceptance of the terms and conditions of this disclaimer and waiver.